
Technical data sheet

503304 **[EN]**


www.axhell.com

Channel UBuild GO Ø160 + 6mm Slotted Composite PA Grating B125


General View

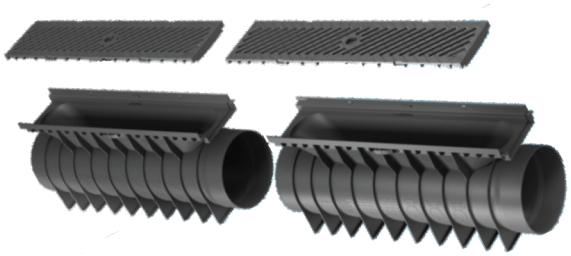


Side View

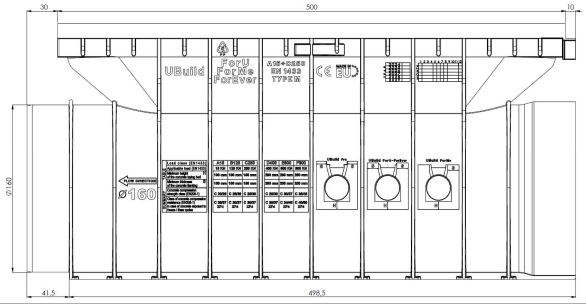


Top view

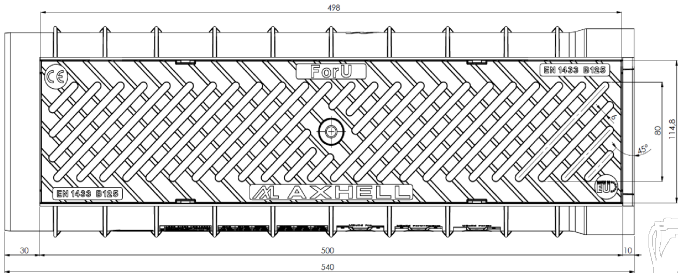

Cross-section

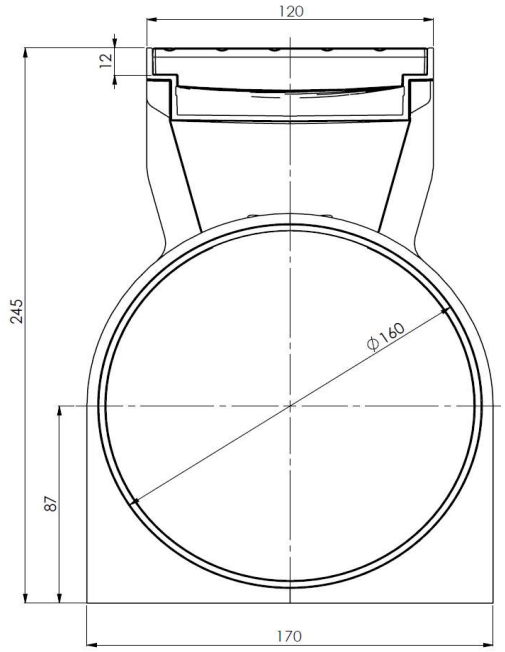

Composite PA Slotted 6 mm

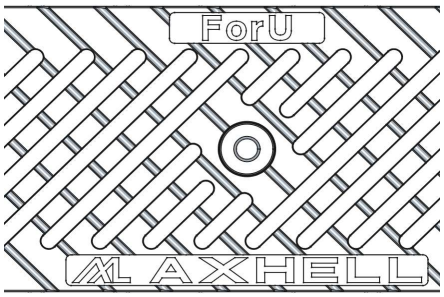

Dimensions and features

Lenght (mm)	500	Drainage capacity l/s	6,130
Width (mm)	170	(85% fill level, minimum slope 0.1%)	-
Grating width (mm)	115	Color	Black
Height (mm)	245	Available colors	Black
Material	PP // PA	Qty per pallet (pcs)	40
Weight (Kg)	1,70	Qty per pallet (meters)	20
Draining surface (cm2)	155,000	Stacked pallets	2
Surface finishing	Composite PA	Pallet type (mm)	800 x 1200
Class of load (UNI EN 1433)	B125 (UNI EN 1433)	Barcode	6427301004218
Outlets	1x Ø 160		

Available accessories

Axhell Drain Srl reserves the right to make changes to the technical data without prior notice
Dimensions and weight are subject to standard manufacturing tolerances.
Products must be installed according to Axhell's specifications and applicable regulations.
Axhell Drain Srl Str. Argeselu nr. 611 - Platforma WIDA PARK - 117451 Mărăcineni, Judet Argeș, România - Tel: +40 (348) 402 764 - e-mail: info@axhell.com

Data sheet number DS_503304_02 | Revision 25_001